

EC 227

XSafe Eco

Self Contained Ice Machine 170 kg

Item
Project
Quantity



FEATURES

- Produces individual Gourmet crystal clear ice cubes.
- Resistant stainless steel exterior.
- Advanced diagnostics computerized controls.
- Front panel in & out airflow (air-cooled model only) for built-in installation.
- Front access condenser air filter, removable and washable (air cooled version only).
- Ergonomically designed ice storage access, with disappearing door. Door closing movement dampening system.
- PWD - Progressive Water Discharge: pumps excess residual water up to a distance of 15 meters.
- XSafe: natural sanitation system, integrated inside the ice maker and operating automatically 24/7 to keep equipment clean & safe.



EC L
Large Gourmet 39 g
Ø 38 mm - H 41 mm



EC M
Medium Gourmet 20 g
Ø 30 mm - H 34 mm

CONDENSING
SYSTEM

Water cooled
Air cooled

REFRIGERANT GAS

R290

VOLTAGE
V/HZ/PH

230\50\1

Model	Cube	Ø	H	Weight
EC L	Large	38 mm	41 mm	39 g
EC M	Medium	30 mm	34 mm	20 g

CERTIFICATIONS



OPERATING REQUIREMENTS

	Minimum	Maximum
Air temperature	10	43
Water temperature	5	38
Water pressure	1 bar (14 psi)	5 bar (70 psi)
Electrical voltage	-10%	+10%

IMPORTANT NOTICE

Models and specifications are subject to change without notice. This spec sheet is meant for commercial purpose only. For technical documentation please refer to our service manuals.

www.scotsman-ice.it
www.scotsman-ice.com


Self Contained Ice Machine 170 kg

EC 227 *XSafe EcoX*
Self Contained Ice Machine 170 kg

Scotsman®
Ice Systems

Item
Project
Quantity

Self Contained Ice Machine 170 kg

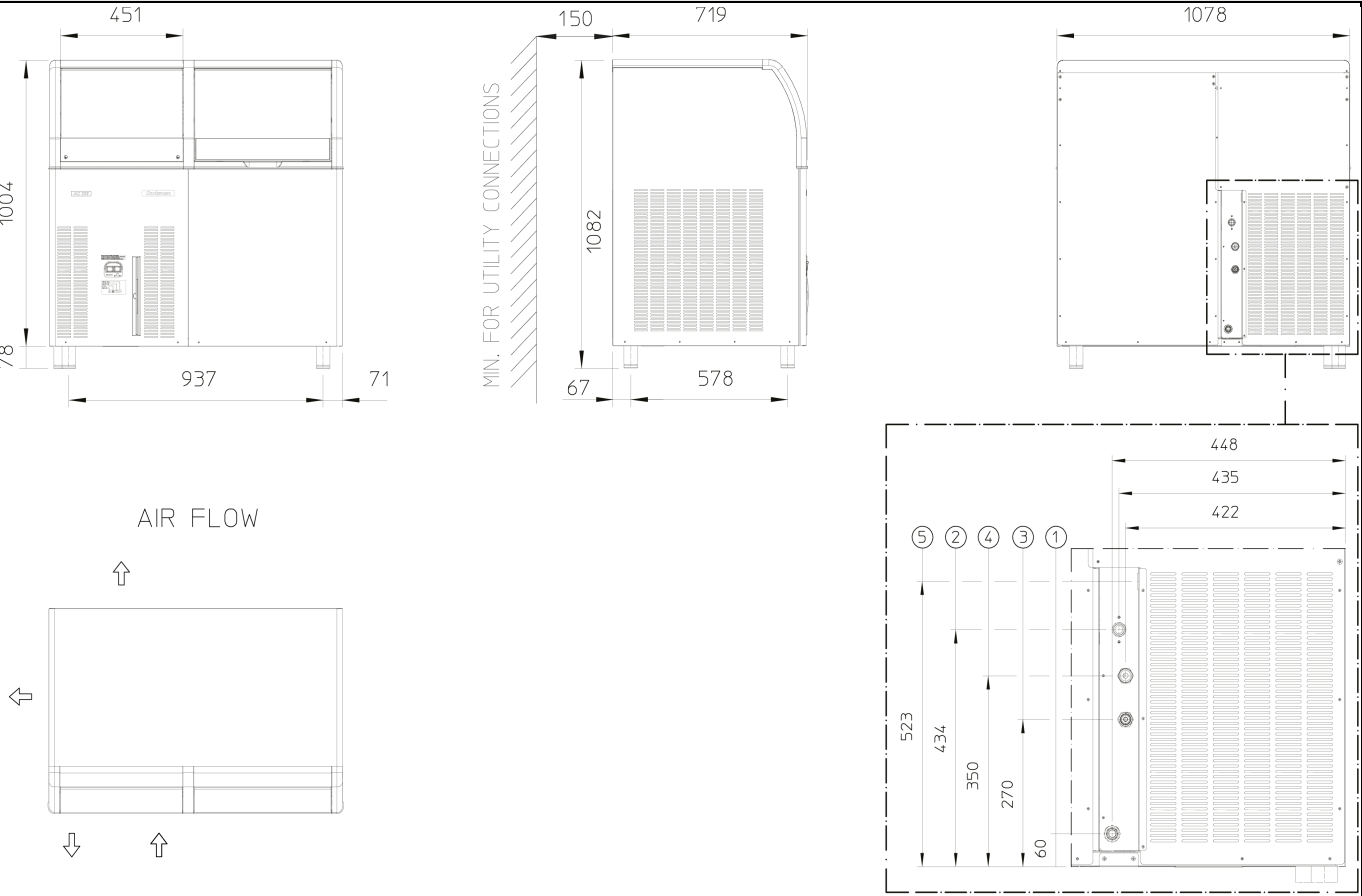

UNIT DATA			SHIPPING DATA			(*) Data refer to 32°C Amb. / 21°C Water temperature conditions							
Size (W x D x H)			Size (W x D x H)										
Net weight			Gross weight										
1.078 x 715 x 1.005 mm			x x mm										
kg			kg										
			24 h ice production kg C Amb. / °C Water			Cap bin	Heat Rejection	Energy Consumption (*)	Water Usage (*)	instant power	circuit wires	Max. Fuse Size	
Version	Voltage	Condensation	10°C/10°C kg	21°C/10°C kg	32°C/21°C kg	kg	kW	kWh/ 24h	l/h	W	No. x Ømm2	A	
ECM 227 WS	230\50\1	W	170	165	150	70	3,6	24	168	1.075	3 x 1,5	10	
ECM 227 AS	230\50\1	A	165	160	130	70	2,8	28	21	1.400	3 x 1,5	10	
ECL 227 AS EASY	230\50\1	A	150	145	130	70	2,8	28	14	1.400	3 x 1,5	10	