

AC 206 ICE SHOT

Self Contained Ice Machine 110 kg

Item #:
Project:
Quantity:



FEATURES

- Dual Mode: produces alternatively individually formed Ice-shot glasses (2 cl) or XL Gourmet Ice Cubes (60 grams).
- Resistant stainless steel exterior. Pivoting rear casters.
- Air cooled version only: front access condenser air filter, removable and washable.
- Easily accessible front panel mount ON-OFF Switch
- Routine maintenance visible alarm light on front panel
- Ergonomically designed ice-storage access, with disappearing door. Do-or-closing movement dampening system.



AC 206 ICE SHOT
Ice Shot 40 g
Ø 44 x H 46 mm



AC XL 206
Extra Large Gourmet 60 g
Ø 44 x H 46 mm

CONDENSING SYSTEM

Air cooled
Water cooled

REFRIGERANT GAS

R404A
R452A

VOLTAGE V/Hz/ph

230/50/1
230/60/1

INTERNAL BIN CAPACITY

50 kg

CERTIFICATIONS



OPERATING REQUIREMENTS

	Minimum	Maximum
Air temperature	10	43
Water temperature	5	38
Water pressure	1 bar (14 psi)	5 bar (70 psi)
Electrical voltage	-10%	+10%

IMPORTANT NOTICE:
Models and specifications are subject to change without notice.
This spec sheet is meant for commercial purpose only.
For technical documentation please refer to our service manuals.

www.scotsman-ice.it
www.scotsman-ice.com


Self Contained Ice Machine 110 kg

AC 206 ICE SHOT

Self Contained Ice Machine 110 kg

Item #:
Project:
Quantity:

Self Contained Ice Machine 110 kg

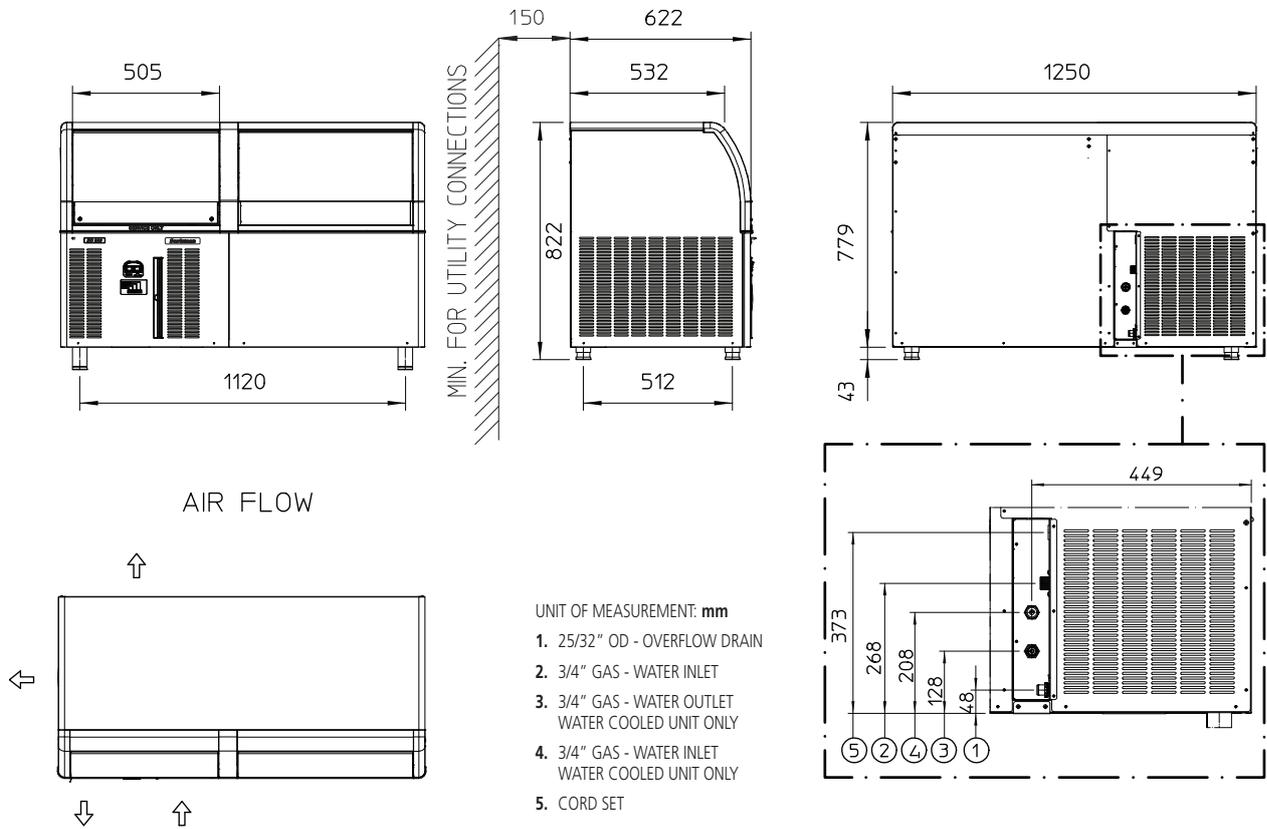

UNIT DATA		SHIPPING DATA		(*) Data refer to 32°C Amb. / 21°C Water temperature conditions									
Size (W x D x H)		1250 x 620 x 859 mm		Carton (W x D x H)		1320 x 690 x 960 mm							
Net weight		82 kg		Weight		95 kg							
Version	Voltage	24 h ice production kg °C Amb. / °C Water			Energy consumption (*)		Water usage (*) l/h	Instant power W	Compressor W	Circuit wires No. x Ømm ²	Max. fuse size A		
		10°C/10°C kg	21°C/10°C kg	32°C/21°C kg	kWh/100 kg	kWh/24h							
ACIS 206 AS	230/50/1	110	102	83	22.3	18.5	23.5	700	1760	3 x 1.5	16		
ACIS 206 WS	230/50/1	95	93	81	25.7	20.7	81.3	900	2100	3 x 1.5	16		
ACXL 206 AS	230/50/1	102	100	80	21.9	17.5	15.0	700	1760	3 x 1.5	16		
ACXL 206 WS	230/50/1	88	87	75	26.9	20.2	81.3	900	2100	3 x 1.5	16		
ACIS 206 AS	230/60/1	95	93	81	27.5	22.0	25.0	1050	2200	3 x 1.5	16		
ACXL 206 AS	230/60/1	88	87	75	27.8	20.8	0.2	1050	2200	3 x 1.5	16		