

EC 47

XSafe EcoX

Self Contained Ice Machine 27 kg

Item
Project
Quantity



FEATURES

- Produces individual Gourmet crystal clear ice cubes.
- Resistant stainless steel exterior.
- Advanced diagnostics computerized controls.
- Front panel in & out airflow (air-cooled model only) for built-in installation.
- Front access condenser air filter, removable and washable (air cooled version only).
- Ergonomically designed ice-storage access, with disappearing door.
- PWD - Progressive Water Discharge: pumps excess residual water up to a distance of 15 meters.
- XSafe: natural sanitation system, integrated inside the ice maker and operating automatically 24/7 to keep equipment clean & safe.



EC M
Medium Gourmet 20 g
Ø 30 mm - H 34 mm

CONDENSING
SYSTEM

water cooled
air cooled

REFRIGERANT GAS

R290

VOLTAGE
V/HZ/PH

230\50\1

Model	Cube	Ø	H	Weight
EC M	Medium	30 mm	34 mm	20 g

CERTIFICATIONS



OPERATING REQUIREMENTS

	Minimum	Maximum
Air temperature	10	43
Water temperature	5	38
Water pressure	1 bar (14 psi)	5 bar (70 psi)
Electrical voltage	-10%	+10%

IMPORTANT NOTICE
Models and specifications are subject to change without notice. This spec sheet is meant for commercial purpose only. For technical documentation please refer to our service manuals.

www.scotsman-ice.it
www.scotsman-ice.com

Self Contained Ice Machine 27 kg


EC 47 *XSafe EcoX*

Self Contained Ice Machine 27 kg

Scotsman®
Ice Systems

Item
Project
Quantity

Self Contained Ice Machine 27 kg

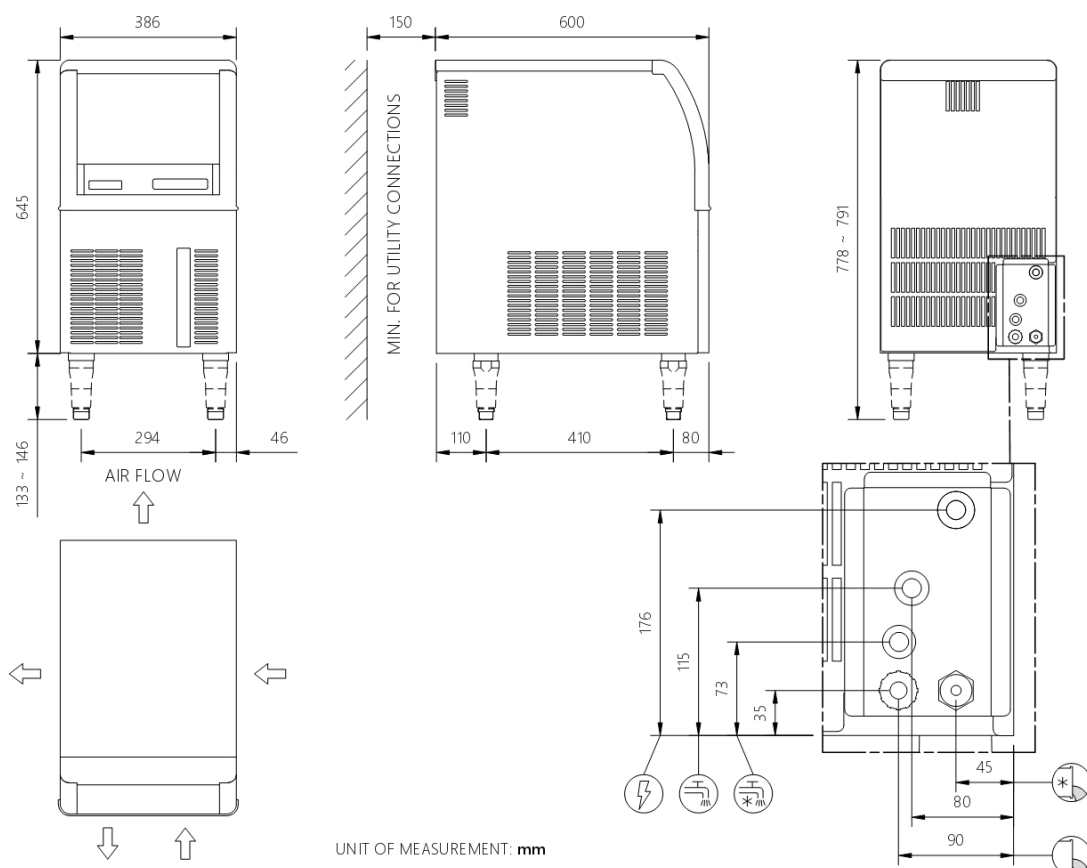

UNIT OF MEASUREMENT: mm

UNIT DATA			SHIPPING DATA			(*) Data refer to 32°C Amb. / 21°C Water temperature conditions							
Size (W x D x H)			Size (W x D x H)										
386 x 600 x 643 mm			460 x 670 x 760 mm										
Net weight			Gross weight										
37 kg			42kg										
			24 h ice production kg C Amb. / °C Water			Cap bin	Heat Rejection	Energy Consumption (*)	Water Usage (*)	instant power	circuit wires	Max. Fuse Size	
Version	Voltage	Condensation	10°C/10°C	21°C/10°C	32°C/21°C	kg	kW	kWh/ 24h	l/h	W	No. x Ømm2	A	
			kg	kg	kg								
ECM 47 WS	230\50\1	W	27	24	21	9	0,7	5	21	280	3 x 1,0	10	
ECM 47 AS	230\50\1	A	24	22	18	9	0,7	14	4	350	3 x 1,0	10	

Milano

Madrid

Chicago

Dubai

Singapore

Shanghai

Johannesburg